


Alclad and Brazing Sheets and Strips

Processed Products

Core Alloys	3003, 3005
Cladding Alloys	4004, 4045, 4343
Sides Clad	One or Both Sides(upon request)
Cladding Thickness	5%, 10%, 15%(upon request)
Temper	O(full annealed) H24(strain-hardened and partially annealed - 1/2 hard)

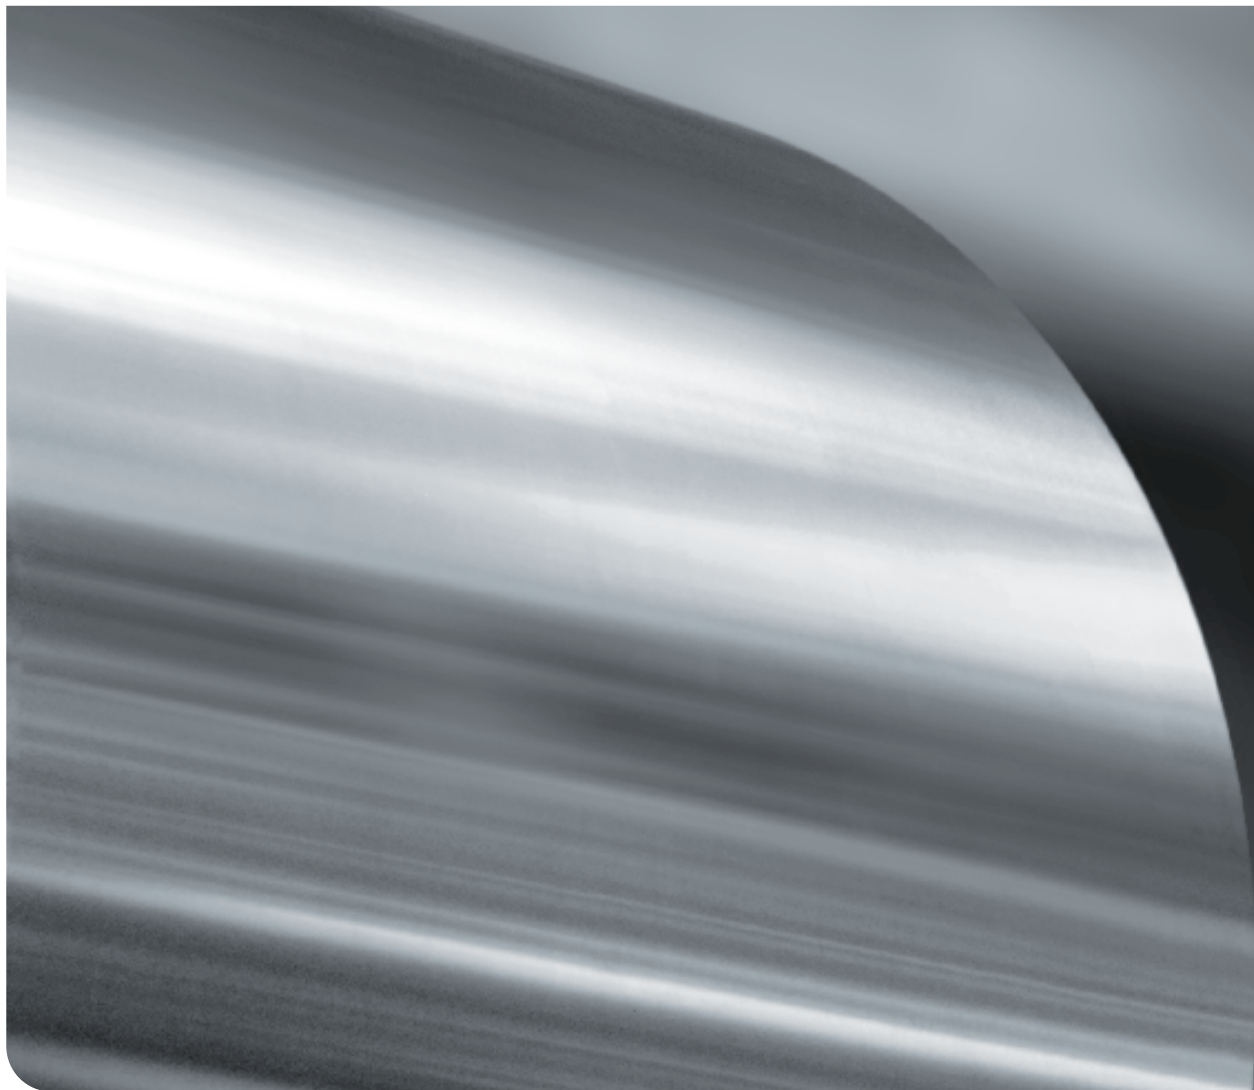

Vimetco Trading Srl
Rivergate Center
No. 64 Splaiul Unirii
040036 Bucharest, Romania

Phone +40 750 067 314
Fax +40 21 408 35 82

vimetco@vimetco.ro
www.vimetco.com

vimetco 

Alclad and Brazing Sheets and Strips



Component Alloys

Core	Cladding
3003	4004, 4045, 4343
3005	4004, 4045, 4343

Dimensions

	mm
Thickness	0,5 - 3
Width	880 - 1250
Length for sheets	1000 - 4000
Coil dimensions	Inside Diameter, ID 508 ± 12,7
	Outside Diameter, OD max. 1500
	Eye to sky / Eye to wall deliveries

Technical conditions

Chemical compositions, tempers, mechanical properties, dimensional tolerances, surface conditions etc. are according to the relevant standards (the latest editions): EN 573-3, EN 515, EN 485-1, EN 485-2, EN 485-4 or ASTM B 209 or according to technical specification agreed with customer.



Certificate no.
10714/01 09

Certificate no.
AAM-3104

Certificate no.
WZ 1719 01